

MACCHINE VIBRANTI LINEARI VRD - VRM

Progettate per applicazioni speciali di sbavatura, lucidatura e brillantatura.

Questo tipo di macchina può essere anche prodotta in dimensioni diverse, secondo le necessità del cliente. Particolamente indicata per l'anticatura di lastre in pietra.

Grazie all'applicazione di separatori mobili, è possibile creare settori di trattamento individuali all'interno della macchina.

Caratteristiche principali:

- Vasca in acciaio normalizzato, rivestita in Poliuretano stampato a caldo.
- 2 motori vibranti laterali con masse eccentriche regolabili.
- Possibilità di effettuare lavorazioni in continuo.

LINEAR VIBRATING MACHINES VRD - VRM


Designed for special operations of deburring, polishing and burnishing, this vibrating machine can be realized in several dimensions to respond to the different costomer's need.

Perfectly employed for stone tiles aging (antique finishing). According to the working applications it is possible to apply separator gates to create independant treatment areas inside the tank.

Main features:

- Steel vibrating tank lined with polyurethane.
- Two vibrating motors fixed sideways, equipped with adjustable weights.
- Continuous working cycle possibility.

	CAPACITÀ dm ³ CAPACITY dm ³	DIMENSIONI • DIMENSION				POTENZA KW POWER KW
		A	B	C	D	
VRD 50	50	650	800	300	1.500	2 x 0,25
VRD 120	115	900	850	400	1.740	2 x 0,36
VRD 250	250	1500	1000	500	2.450	2 x 1,1
VRD 800	800	1500	1100	800	2.450	2 x 2,2
VRD 950	960	2500	1100	650	2.950	2 x 4,5
VRD 2000	1800	2000	1200	1300	3.350	2 x 9,0

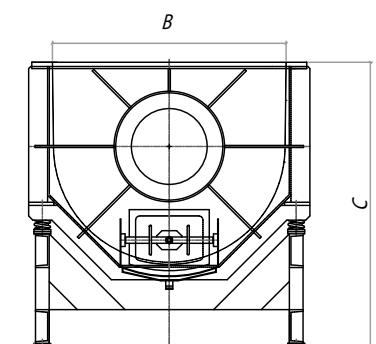

V

